

DEKO FV

A FOLDING PARTITION AS A FLEXIBLE ROOM DIVIDER

Some people prefer large open spaces, while others prefer closed areas. DEKO's flexible folding partitions cater for both options and create an individual environment. DEKO FV is the ideal solution for quick, easy division. With sound reduction of up to 52 dB and a fire requirement of EI 30, DEKO FV is a perfect choice for meeting and conference rooms, office units, canteens and classrooms, and in school and institutional buildings. You decide on the number of connecting modules yourself, based on your wishes and requirements, and on the size of the partition.

52 dB*

SOUND
*up to

EI 30*

FIRE
*up to

80-88mm

THICKNESS





PROPERTIES

- Modules available top-hung or with a floor track
- Individual surface finish
- Easily wipeable surfaces
- The size of the partition can be adapted as required
- Protective edges
- Easy to operate
- Built-in door module
- Fire tested
- Sound tested
- Several types of glazed panels

FOLDING PARTITION

One room, several options


The specially designed structure consists of aluminium profiles, environmentally friendly timber panels and soundproofing material with rubber strips at the top and bottom, providing a tight closure and ensuring sound reduction of up to 52 dB. The partition is the only one in Europe to be fire classified as EI 30 at a height of 5m.

STRONG SURFACE TREATMENT

The folding partitions come with a strong, easily wipeable surface treatment and a narrow, protective aluminium edge. This guarantees a long service life.

THE SURFACE OF YOUR CHOICE

The panels can be painted in the colour of your choice or coated with other types of surface, for example, laminate, melamine, white board or timber veneer, lending the folding partition an attractive, unique finish. It is also possible to build glazed panels into the panels and acoustic-regulating surface.

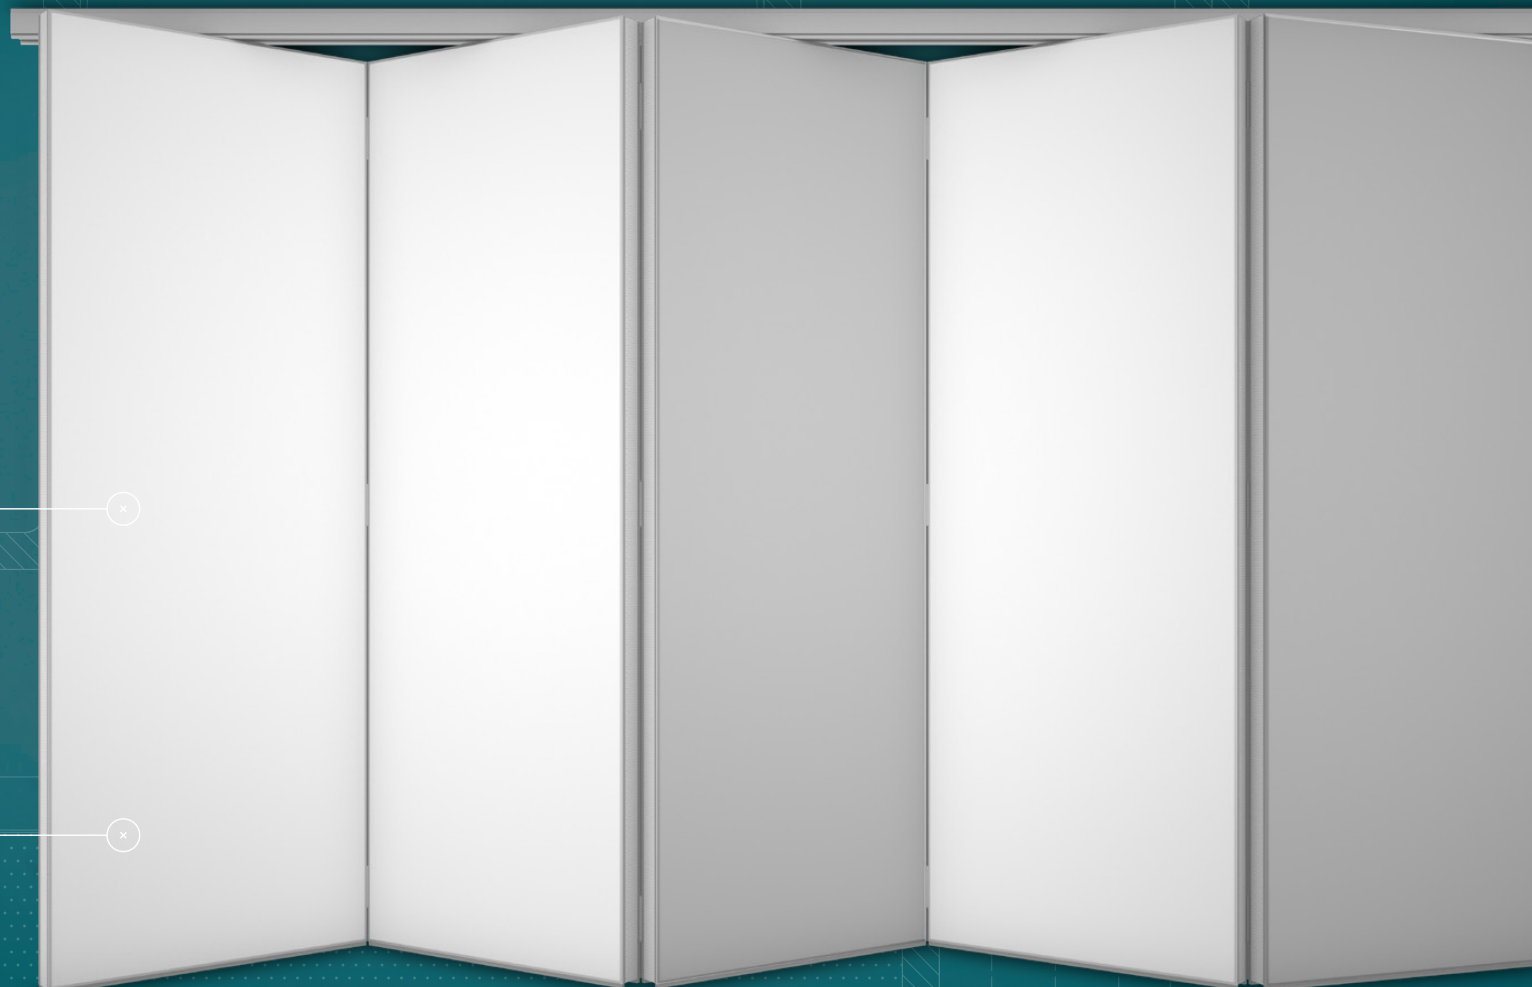




TYPE SUMMARY

Product	Sound insulation (Rw)	Partition thickness (mm)	Weight (kg/m ²)	Fire resistance (min)
DEKO FV 41	41 dB	80	26	-
DEKO FV 44	44 dB	80	26	-
DEKO FV 47	47 dB	80	35	-
DEKO FV 49	49 dB	80	40	-
DEKO FV 50	50 dB	80	42	-
DEKO FV 52	52 dB	80	42	-
DEKO FV EI 30	47 dB	88	40	EI 30 ¹


1) Fire test and fire classification according to applicable common European standards.

For updated values and details, please visit deko.com


DETAILS AND STACKING OPTIONS

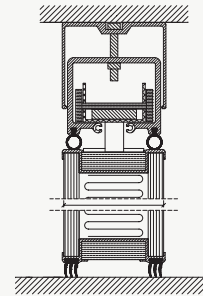


TOP HUNG
CEILING AND FLOOR CONNECTION

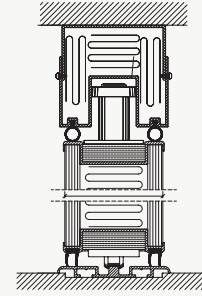

FLOOR TRACK
CEILING AND FLOOR CONNECTION

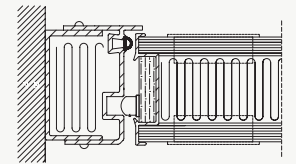

START PROFILE / WALL CONNECTION

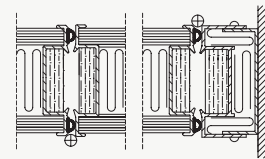

END PROFILE / WALL CONNECTION



SIDE STACKING
SINGLE LEAF



CENTRE STACKING
SINGLE LEAF



SIDE STACKING
DOUBLE LEAF



CENTRE STACKING
DOUBLE LEAF