

DEKO PV

THE CLASSIC AND DEMOUNTABLE SOLID PARTITION

This profile partition is the cost effective partition system. Ready in record time!

DEKO PV consists of individual modules based on a steel framework. The framework is concealed behind pre-treated gypsum boards to form an extremely strong partition. On the outside, the solid partition has the appearance of drywall with slim and vertical aluminium profiles. Slim aluminium profiles also interface with ceiling and floor to offer a partition with attractive clean lines.

66 dB*

SOUND
*up to

EI 60*

FIRE
*up to

43-222mm

THICKNESS





PROPERTIES

- Finished with elegant aluminium profiles
- Quick and easy to install
- Relocatable
- Cost effective
- Easy to incorporate matching doors and glazed modules
- Environmentally friendly
- Wide range of different finishes and colours
- Pre-treated, durable, wipeable surface
- Built-in skirting at floor level and attractive profiles for doors and glass
- Whiteboards, shelves and boards can be fixed directly to the profile system or gypsum surface
- Indoor climate certified
- CE-marked
- Fire rated up to EI 60
- Sound tested up to 66 dB

SOLID PARTITIONS

Perfectly formed for instant effect

DEKO PV is the simple solid partition with matching doors and glazed modules. The partition can be adapted to suit all types of buildings, whatever the needs and requirements. DEKO PV is prefabricated, systematised and functional with a finished surface. The partition is quick to install and can be both demounted and reused, if the room needs to be changed. This benefits the environment. The fast installation and finished partition also provide an economically attractive partition solution.

DURABLE SURFACE

All solid surfaces are coated with wipeable surfaces to provide durability and ease of maintenance.



PROFILE JOINT


Aluminium profiles make it easy to relocate units and modules without effect to the partition.

EASY INCORPORATION OF DOORS AND GLAZED MODULES

The solid partition can easily be supplemented with matching door or glazed modules as required, either during installation or later, if any changes are made to the partition. The process is quick and easy.

UNIQUE PROFILE FRAMEWORK

Concealed behind pre-decorated boards, the unique, engineered, 'Z' profile framework offers the highest stability rating of all demountable partitions.

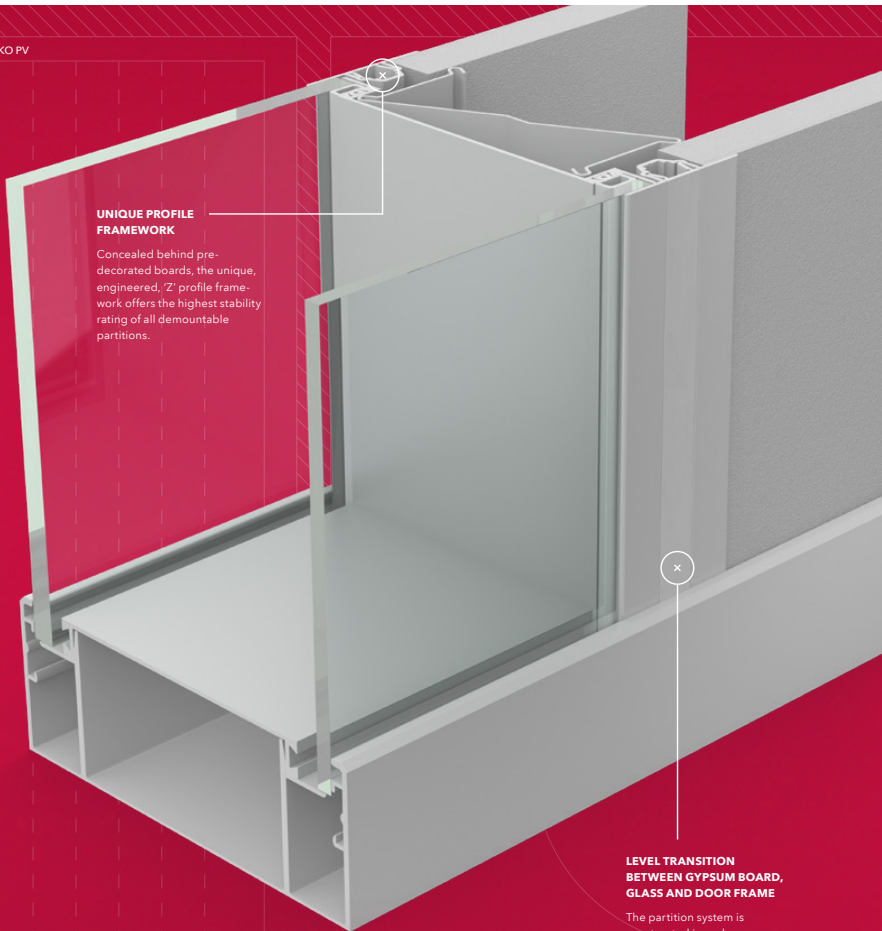

LEVEL TRANSITION BETWEEN GYPSUM BOARD, GLASS AND DOOR FRAME

The partition system is constructed in such a way that there is a natural, smooth transition between the gypsum board, glass and door frames.

QUICK AND EASY TO INSTALL

The profile partition is based on a flexible system, which can be demounted and reused if the need arises. You can also choose where to place glass, gypsum board or door.




TYPE SUMMARY


Product	Sound insulation (R' _w)	Sound insulation (R _w)	Fire resistance (min)	Partition thickness (mm)	Weight (kg/m ²)
DEKO PV 590	-	-	-	43	11
DEKO PV 1090	40 dB	44 dB	EI 30	92	25
DEKO PV 1290	50 dB	52 dB	EI 60	118	45
DEKO PV 1490	53 dB	58 dB	EI 60	144	50
DEKO PV 1890	55 dB	61 dB	EI 60	196	52
DEKO PV 2190	60 dB	66 dB	EI 90	222	72

For updated values and details, please visit deko.com


DETAILS




CEILING CONNECTION




CEILING CONNECTION




FLOOR CONNECTION




GYPSUM / GLASS CONNECTION




GYPSUM / GYPSUM CONNECTION

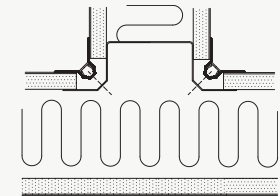


T-CONNECTION



90° CORNER



DEKO DG - DOUBLE GLAZED DOOR



DEKO TD - SOLID TIMBER DOOR